

Product information

AMICURE[®] IC-322

Curing Agent for Polyisocyanate Resin

DESCRIPTION

Amicure IC-322 curing agent is specifically designed for polyisocyanate resin. Preferred resins of choice are standard and low viscosity HDI trimer isocyanates for a range of industrial applications. Amicure IC-322 curing agent offers formulation latitude for use in high gloss and satin finish coatings. Clear and pigmented topcoats based on Amicure IC-322 curing agent offer high aesthetics and excellent UV durability.

Coatings based on Amicure IC-322 curing agent are recommended to be used in combination with a solvent-free epoxy primer. Working and drying times are accelerated under high humidity conditions.

TYPICAL PROPERTIES

Property	Value	Unit	Method
Appearance	Light yellow liquid		
Colour	≤215	APHA	ASTM D 1544
Viscosity @ 25°C	50-250	mPa.s	Brookfield RVTD, spindle 4
Water Content	≤0.15	wt %	Karl Fisher Method
Specific Gravity @ 21°C	1.06		
Equivalent	405	Wt/{H}	
Recommended Use Level	185-195	PHR	With HDI Trimer, 22 wt% NCO, ca. 2,500 mPa.s at 25°C

ADVANTAGES

- Fast cure speed
- Satin finish coatings
- Coatings up to 500 µm in single pass
- Excellent surface appearance
- Low mix viscosity for improved handling
- Application by squeegee

APPLICATIONS

- Commercial and industrial flooring
- Satin finish topcoats

SHELF LIFE

At least 18 months from the date of manufacture in the original sealed container at ambient temperature. Store away from excessive heat and humidity in tightly closed containers.

STORAGE AND HANDLING

Refer to the Safety Data Sheet for Amicure IC-322 curing agent.

TYPICAL HANDLING PROPERTIES¹ 25°C, 50% RH

Property	Value	Unit	Method
Mix Viscosity	300-600	mPa.s	Brookfield RVTD, spindle 4
Working Pot Life	70-80	min	Time to viscosity build of 12 Pa.s at 25°C
Thin Film Set Time	2.5	h	ASTM D 5895 - BK Drying Recorder, Phase 3
PersoZ Hardness after 1 / 7 days	40/170	s	
Typical cure schedule	2-7	days	

TYPICAL HANDLING PROPERTIES¹ 5°C, 50% RH*

Property	Value	Unit	Method
Thin Film Set Time	5.5	h	ASTM D 5895 - BK Drying Recorder, Phase 3
PersoZ Hardness after 1 / 7 days	15/130	s	

(1) With HDI Trimer, 22 wt% NCO, ca. 2,500 mPa.s at 25°C


TYPICAL PERFORMANCE¹

Property	Value	Unit	Method
UV-A Resistance after 500 h	3.5	ΔE	
Impact Resistance Direct/Reverse	>200/>200	kg.cm	
Abrasion Resistance, CS17, 1000 cycli	50	mg loss	
Gloss (60°)	>90		
Gloss with matting agent (60°)	40-45		
Glass Transition Temperature	40	°C	Differential Scanning Calorimetry (DSC)
Carbamation Resistance	5	Scale 1-5, 5=best	ISO 2812 (wet patch method)

SUPPLEMENTARY DATA

POLYCARBAMIDE RESIN TECHNOLOGY - MODIFIED AMINE CURING AGENTS FOR POLYISOCYANATES: The new polycarbamide resin technology offers a unique package for top coat application with Amicure IC-322 curing agent. Amicure curative based clear and pigmented coatings exhibit rapid property development, high UV stability and high aesthetics. Amicure IC-322 curing agent is specifically designed to deliver high gloss and satin coatings that can be applied up to 500 #m in a single pass, when cured with standard HDI trimer or biuret isocyanates.

An epoxy primer is recommended for best performance and longevity of the flooring system.

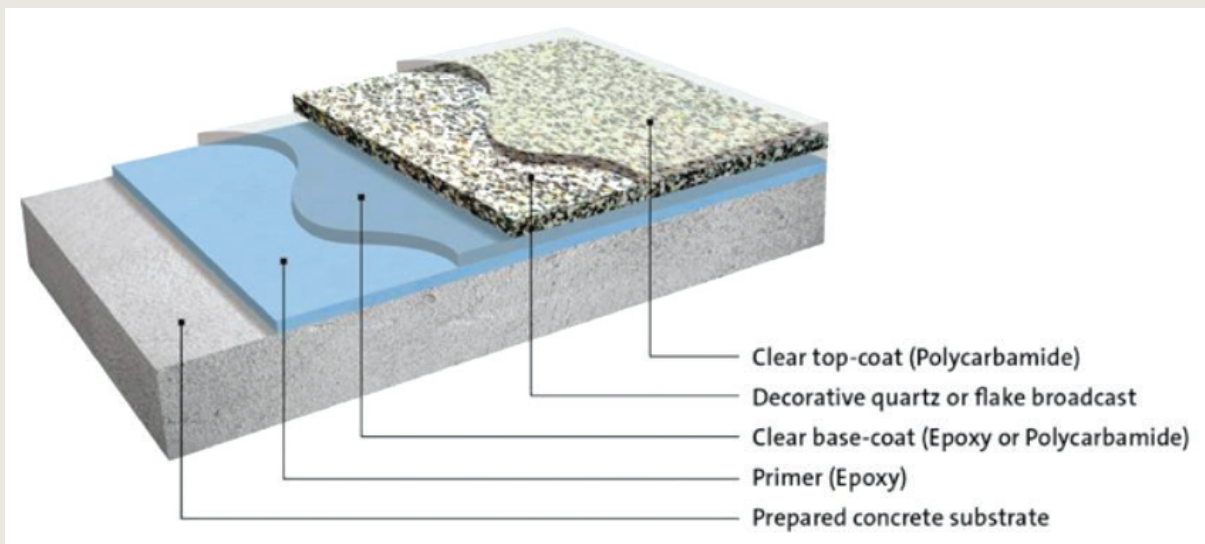

(1) With HDI Trimer, 22 wt% NCO, ca. 2,500 mPa.s at 25°C

AMICURE IC-322 CURING AGENT

Performance	Comparable Technology	Polycarbamide Property Characteristics
UV and light stability	2K Polyurethane	ΔE 3.5 after 500 h QUV-A
Abrasion, impact resistances and flexibility	2K Polyurethane	50 mg loss (CS17, 1kg, 1000 cycli); >200 kg.cm Direct and Reverse impact; 25% Tensile elongation at break
Film thickness	Methacrylate (MMA)	500 μm Clear coatings

AMICURE IC-322 CURING AGENT COMPARED WITH AMICURE IC-221 AND IC-321 CURING AGENT

Polycarbamide resins can provide excellent low temperature cure and a rapid return to service. Amicure IC-322 curing agent facilitates a lower initial mixed viscosity along with similar working time to Amicure IC-321 curing agent. The return to service is however faster than Amicure IC-321 curing agent.

FORMULATION GUIDELINES

The following recommendations are offered to streamline further technical work with polycarbamide resin technology.

FORMULATION GUIDELINES AND TROUBLE SHOOTING

Stoichiometry

Ensure the appropriate stoichiometry of polyisocyanate resin is used with Amicure IC curing agent. Recommended is to start with a stoichiometry index of 1.05 (isocyanate to amine)

Coating haziness related binder components

Use the recommended standard HDI trimer polyisocyanate resin (eg Vestanat HT 2500/100)

Alternatively, lower viscosity HDI trimers may be used (eg Vestanat HT2500 LV) as well as solvent-based HDI trimers (eg Vestanat HT2500E)

Addition of other components such as polyols, diluents, modifiers and/or other amines could cause incompatibility or effect working time

Coating haziness related to air release agent, defoamer, leveling additive or dispersing additive

Tego Airex 931 (Evonik)

Tego Wet 250 and 260 (Evonik)

Disperbyk 103 (BYK Chemie)

Use of solvents

Solvent are optional and can be added to reduce viscosity and increase pot-life. Recommended solvents include hydrocarbon and ester-based materials such as: t-butyl acetate, para-chlorobenzotrifluoride, dimethyl carbonate, hydrocarbon solvent (Aromatic 100) or xylene

When using solvent(s), care should be taken to review solvent entrapment during cure. Minimize solvent entrapment by applying thin film coating (<250 µm)

Use of matting agent

Acematt can be added to reduce gloss and create a matt surface

Use air release agent / defoamer, see recommendations above

Mix at slow speed to avoid air entrapment

The fumed silica can settle in time, always stir mixture before use

TRADEMARK REFERENCE

Evonik Industries GmbH

Amicure® Curing Agent, Anquamine® Curing Agent, Vestanat®, Acematt®, Tego®

BASF

Tinuvin®



STARTING POINT FORMULATIONS

AMICURE IC-322 CURING AGENT CLEAR HIGH GLOSS TOPCOAT

PART A	Parts by Weight	Supplier
(1) HDI Trimer Isocyanate (22 wt% NCO)	100	Evonik
PART B		
(2)Amicure IC-322 curing agent	187	Evonik
(3) Tinuvin 292/1130 (1:1)	2	BASF
(4) Airex 931	2	Evonik
TOTAL PARTS	291	

APPLICATION INSTRUCTION

Mix Part A and B under slow or medium speed for 2-3 minutes taking care not to introduce excessive air and moisture. Once thoroughly mixed, pour material on to substrate, spread by squeegee or trowel and back roll for proper leveling as required, taking care not to excessively roll.

Amicure IC-322 is fully compatible with Amicure IC-221 and IC-321 and can be combined in the formulation to modify reactivity.

AMICURE IC-322 CURING AGENT CLEAR SATIN TOPCOAT

PART A	Parts by Weight	Supplier
(1) HDI Trimer Isocyanate (22 wt% NCO)	100	Evonik
PART B		
(2)Amicure IC-322 curing agent	187	Evonik
(3) Tinuvin 292/1130 (1:1)	2	BASF
(4) Airex 931	2	Evonik
(5) Disperbyk 103	3	BYK Chemie
(6) Molecular Sieve A3	2	
(7) Acematt 3600	36	Evonik
TOTAL PARTS	332	

DIRECTIONS FOR PREPARING AMICURE IC-322 SATIN FORMULATIONS

- Charge Amicure IC-322 to a container and set-up mixer with a paddle stirrer
- Charge components 3-6 under low shear mixing
- Charge matting agent slowly while continue to stir at lowspeed. Minimize air and moisture entrainment while mixing.
- When homogenous, stop the stirring and pour the material into a sealed container. Leave for at least 24 hours before application.

Amicure® is a registered trademark of Evonik Industries AG or one of its subsidiaries.

Disclaimer

This information and all further technical advice are based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third party intellectual property rights, especially patent rights. In particular, no warranty, whether express or implied, or guarantee of product properties in the legal sense is intended or implied. We reserve the right to make any changes according to technological progress or further developments. The customer is not released from the obligation to conduct careful inspection and testing of incoming goods. Performance of the product described herein should be verified by testing, which should be carried out only by qualified experts in the sole responsibility of a customer. Reference to trade names used by other companies is neither a recommendation, nor does it imply that similar products could not be used.

EVONIK OPERATIONS GMBH

Business Line Crosslinkers
Paul-Baumann-Str. 1
45764 Marl
Germany

www.evonik.com/crosslinkers

Product Information: APCSE@evonik.com

Sample Request: APCSE@evonik.com

EVONIK CORPORATION

Business Line Crosslinkers
7201 Hamilton Blvd.
Allentown, PA 18195
USA

CrosslinkersProinfo@evonik.com

Crosslinkers-Samples@evonik.com

EVONIK SPECIALTY CHEMICALS (SHANGHAI) CO., LTD.

Business Line Crosslinkers
55, Chundong Road
Xinzhuang Industry Park
Shanghai, 201108
China

CL-Asiainfo@evonik.com

CL-Asiainfo@evonik.com

